


Inch/(mm)

| MODEL   | A               | B              | C               | D              | E              | F            | G            | H             | I             | J             | K             | L                | M             | N              | O            | P              | Q             |
|---------|-----------------|----------------|-----------------|----------------|----------------|--------------|--------------|---------------|---------------|---------------|---------------|------------------|---------------|----------------|--------------|----------------|---------------|
| 710-150 | 5.94<br>(151)   | 3.74<br>(95)   | 5.94<br>(151)   | 6.69<br>(170)  | 1.46<br>(37)   | 1.57<br>(40) | 0.67<br>(17) | 4.72<br>(120) | 0.24<br>(6.2) | 3.58<br>(91)  | 4.29<br>(109) | 9.72<br>(247)    | 2.16<br>(55)  | N/A            | N/A          | N/A            | N/A           |
| 710-002 | N/A             | 3.86<br>(98)   | 8.03<br>(204)   | 8.27<br>(210)  | 0.65<br>(16.5) | 1.57<br>(40) | N/A          | 5.31<br>(135) | 0.24<br>(6.2) | 5.91<br>(150) | 6.30<br>(160) | N/A              | 2.76<br>(70)  | 0.65<br>(16.5) | 2.72<br>(69) | N/A            | 6.38<br>(162) |
| 710-102 | N/A             | 3.86<br>(98)   | 8.46<br>(215)   | 8.27<br>(210)  | 0.65<br>(16.5) | 1.57<br>(40) | 0.79<br>(20) | 5.31<br>(135) | 0.24<br>(6.2) | N/A           | N/A           | N/A              | 2.76<br>(70)  | 0.65<br>(16.5) | 1.93<br>(49) | 10.24<br>(260) | 6.38<br>(162) |
| 710-004 | N/A             | 3.86<br>(98)   | 8.03<br>(204)   | 8.27<br>(210)  | 0.65<br>(16.5) | 1.57<br>(40) | N/A          | 5.31<br>(135) | 0.24<br>(6.2) | 5.91<br>(150) | 6.30<br>(160) | N/A              | 2.76<br>(70)  | 0.65<br>(16.5) | 2.72<br>(69) | N/A            | 8.19<br>(208) |
| 710-104 | N/A             | 3.86<br>(98)   | 8.46<br>(215)   | 8.27<br>(210)  | 0.65<br>(16.5) | 1.57<br>(40) | 0.79<br>(20) | 5.31<br>(135) | 0.24<br>(6.2) | N/A           | N/A           | N/A              | 2.76<br>(70)  | 0.65<br>(16.5) | 1.93<br>(49) | 10.24<br>(260) | 8.19<br>(208) |
| 710-230 | 6.56<br>(166.5) | 4.0<br>(101.5) | 6.28<br>(159.5) | 9.06<br>(230)  | 2.28<br>(58)   | 2.76<br>(70) | 0.79<br>(20) | 5.71<br>(145) | 0.24<br>(6)   | 5.12<br>(130) | 5.12<br>(130) | 13.48<br>(342.5) | 2.76<br>(70)  | N/A            | N/A          | N/A            | N/A           |
| 710-300 | 6.97<br>(177)   | N/A            | N/A             | 12.20<br>(310) | 2.05<br>(52)   | 2.76<br>(70) | 0.79<br>(20) | 7.28<br>(185) | 0.24<br>(6.2) | 6.30<br>(160) | 6.46<br>(164) | 16.46<br>(418)   | 4.21<br>(107) | 0.71<br>(18)   | N/A          | N/A            | N/A           |

| MODEL   | R            | S            | T              |
|---------|--------------|--------------|----------------|
| 710-150 | N/A          | 1.50<br>(38) | N/A            |
| 710-002 | N/A          | 1.38<br>(35) | 0.65<br>(16.5) |
| 710-102 | 1.46<br>(37) | 1.38<br>(35) | 0.65<br>(16.5) |
| 710-004 | N/A          | 3.07<br>(78) | 0.65<br>(16.5) |
| 710-104 | 1.46<br>(37) | 3.07<br>(78) | 0.65<br>(16.5) |
| 710-230 | N/A          | 2.20<br>(56) | N/A            |
| 710-300 | N/A          | 2.95<br>(75) | N/A            |

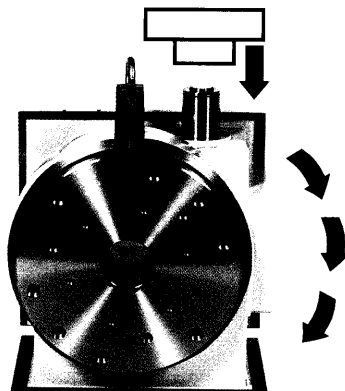

*This illustration represents a machine spindle being used to depress the index cylinder of the Super Rapidex creating an index movement.*